


ACTUATORS · DIN RAIL

Universal Dimming Actuator, 4-Channel

SKU ASUD-04/02.3 · DIN rail mounting

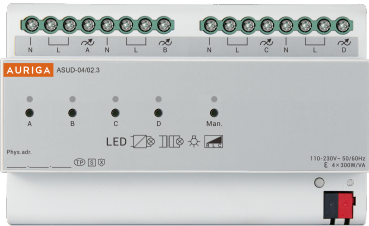

DESCRIPTION

Universal dimming actuator, 4-channel, 8SU MDRC. Four bridgeable channels of RLC and LED dimming for the lighting circuits of an entire zone, mounted in the electrical cabinet. Also available as a 2-channel version (2 × 150 W).

The Dimming control unit is designed for precise dimming control in lighting systems. Featuring 2 or 4 channels with a maximum switching current of 300W per channel. It enables local manual operation.

SPECIFICATIONS

SKU	ASUD-04/02.3
Mounting	DIN rail, 8SU MDRC
Channels	4 × 150 W · bridgeable
Load types	RLC · LED
Supply	110-230 V~ 50/60 Hz
Bus	KNX TP

APPLICATION

LOAD TERMINALS

Four dimming channels, N/L per channel

KNX TP CONNECTOR

Bus terminal with manual channel control